

High Flow Rate FIBC Dischargers

SBB-HFF



EASED MATERIAL DISCHARGE
COMPACT & CONVENIENT

EASY, CLEAN AND SAFE FIBC DISCHARGING


The SBB-HFF-type FIBC Discharger is the ideal stationary solution for efficient FIBC discharging. Its design guarantees safe and handy loading, unloading and FIBC opening. The innovative petal-type flow aid system allows total or partial discharging of the material granting unparalleled efficiency and cost-saving operation even with materials difficult to discharge.

The FIBC loading interface is the core of a system designed to offer easy and safe access while connecting the FIBC outlet valve. This interface allows dust-proof sealing, thus avoiding product leaks and contamination.

The SBB-HFF-type FIBC Discharger with loading interface is **essential for a healthy, clean and safe indoor work environment.**

S-MODEL

for loading by forklift-truck

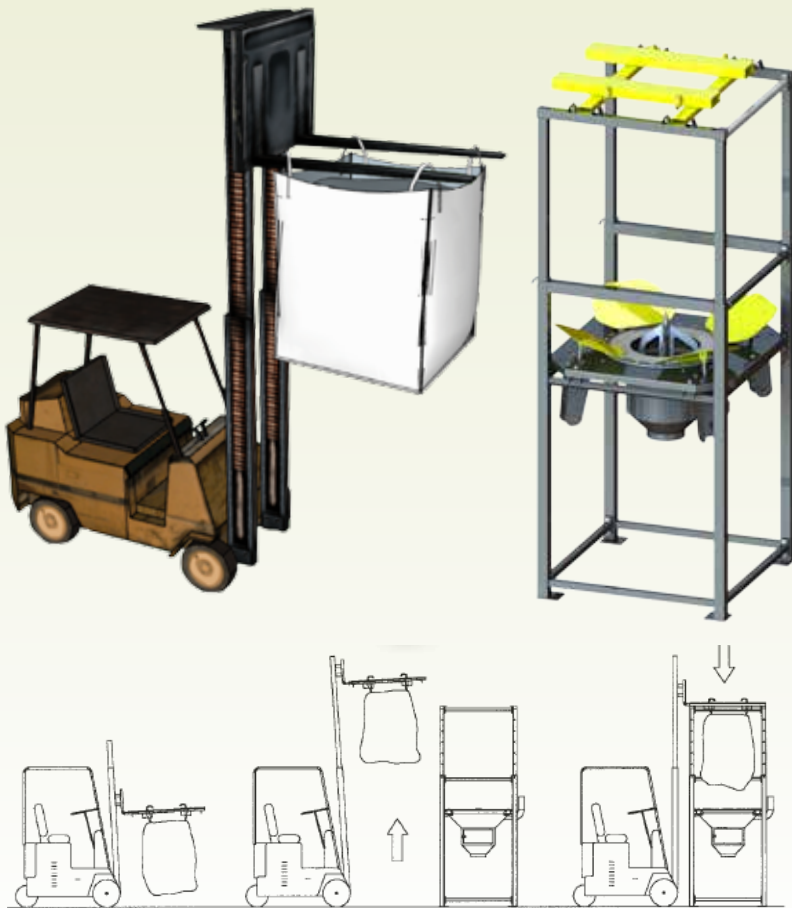

C-MODEL

for loading by crane



M-MODEL

for loading by hoist



Overall Dimensions

| CODE | OUTLET Ø mm | MAX. HEIGHT mm | WIDTH mm | MAX. FIBC DIMENSIONS mm | MAX. FIBC HEIGHT mm | MAX. FIBC WEIGHT kg |
|-----------|----------------|-------------------|-------------|-------------------------------|---------------------------|---------------------------|
| SBB-HFF C | 273 | 1,930 | 1,410 | 1,000 x 1,000 | unlimited | 2,000 |
| SBB-HFF S | 273 | 3,490 | 1,410 | 1,000 x 1,000 | 2,000 | |
| SBB-HFF M | 273 | 4,810 | 1,580 | 1,000 x 1,000 | 2,000 | |

Features

- Modular design, easily adaptable to different bulk solids, FIBC weights and sizes
- Electric motovibrator as material discharge aid
- Innovative emptying system tailored for different material characteristics



Benefits



Internal footprint (no protruding parts) allowing optimised battery configuration



Easily adaptable to a wide range of materials, different FIBC sizes and weights



No labour required for complete FIBC emptying



Large-scale industrial production ensuring attractively priced high-quality product



Full pre-equipment allowing subsequent retrofitting of any accessory

Accessories



LUMP BREAKING FEEDER VALVE
aiding material flow



ELECTRONIC CONTROL PANEL
individually programmable according to specific material properties



CUTTING KIT
3-blade configuration enhancing cutting performance


Application



MECHANICAL FEEDING & CONVEYING



PNEUMATIC CONVEYING

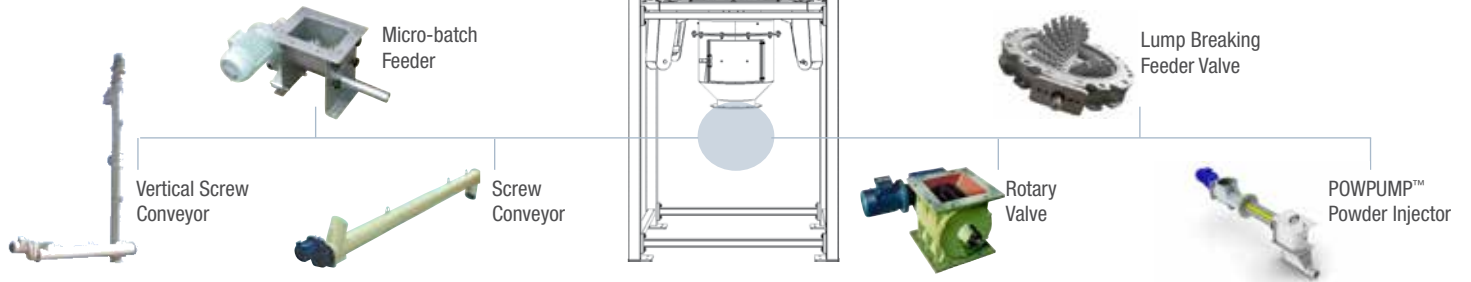

203001696 August 2019 Rights reserved to modify technical specifications.



This brochure has been edited for distribution in European Union countries.

